

Li-SOCL₂ Battery ER26100 (CC)

MWD 150 SERIES:

CCHR150B

1. BASIC SPECIFICATION

● Rated Voltage	3.6V
● Nominal Capacity	13Ah
● Rated Discharge Current	300mA
● Max Working Current	600mA
● Weight	120g
● Cell Diameter	25.4mm
● Cell Length	99.0mm
● Lithium Weight	3.8g


2. MAIN FEATURES

- Suited for high current discharge, both continuous and pulse current
- Temperature range from -40°C~+150°C

Main Applications: Measurement While Drilling (MWD), Logging While Drilling (LWD)

3. ELECTRICAL CHARACTERISTIC

ER26100 (150°C)

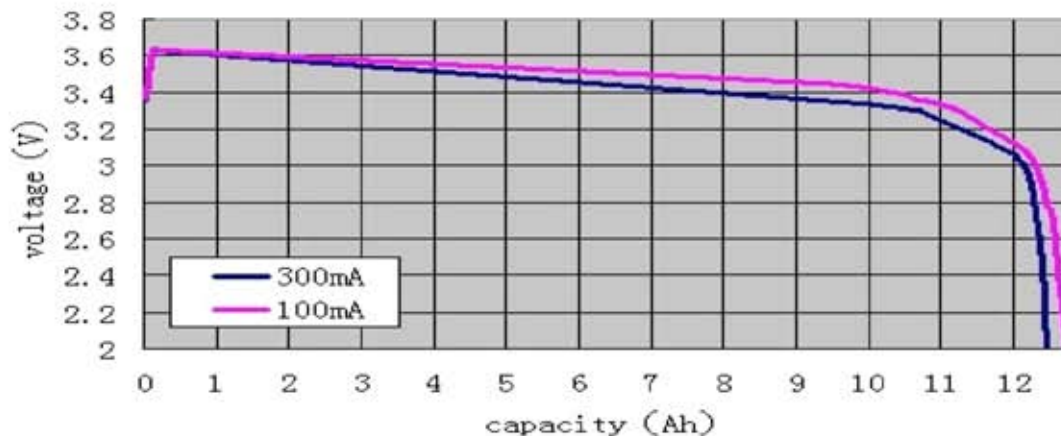

4. WARNING!

- Do not recharge, short-circuit, discharge, deform, over-heat or place the battery near a direct flame. Any of the above actions could cause it to ignite explode or become damaged.
- When storing the battery or throwing it away, be sure to cover it with tape.