



ENEPOWER

MIPCM-10SXP20A
Protection Circuit Module (PCM)


Lilon

PCM for 36/37V Lilon Battery Pack

SPECIFICATIONS

| No. | Test Item | Criterion | |
|-----|----------------------------------|---|------------------------|
| 1 | Voltage | Charging voltage | DC:42V CC/CV |
| | | Balance voltage for single cell | 4.20V±0.025V |
| 2 | Current | Balance current for single cell | 62±5mA |
| | | Low Current consumption for single cell | ≤20µA |
| | | Maximal continuous Charge/Discharging current | 20A |
| 3 | Over Charge Protection | Over charge detection voltage | 4.325V±0.025V |
| | | Over charge detection delay time | 0.5S—2S |
| | | Over charge release voltage | 4.075V±0.025V |
| 4 | Over Discharge Protection | Over discharge detection voltage | 2.50V±0.05V |
| | | Over discharge detection delay time | 10—200ms |
| | | Over discharge release voltage | 2.90±0.05V |
| 5 | Over Current Protection | Over current detection current | 90±10A |
| | | Detection delay time | 5-20ms |
| | | Release condition | Cut load |
| 6 | Short Protection | Detection condition | Exterior short circuit |
| | | Detection delay time | 200-500us |
| | | Release condition | cut load |
| 7 | Resistance | Protection circuitry | ≤20mΩ |
| 8 | Temperature | Operating Temperature Range | -40~+85°C |
| | | Storage Temperature Range | -40~+125°C |
| 9 | Dimensions | L 45.0mm x W 59.0mm x T 9.0mm | |

LAYOUT DIAGRAM

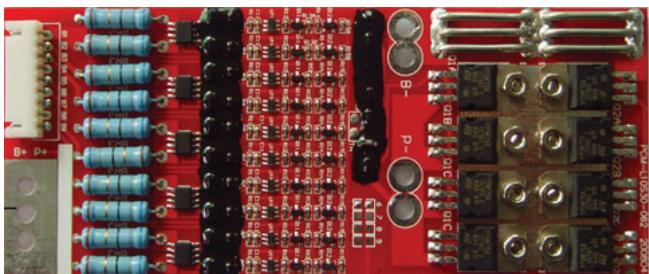

CONNECTION DIAGRAM

